



Fitting a Twist2Go Double Roller Blind

Starting with the sheer blind, insert the blind into the recess at an angle and push the tightener against the wall. Lift the control end of the blind until level and release pressure, the blind will hold itself in place.

We recommend fitting the rear blind approximately 50mm down from the top, and in from the front, of the recess.

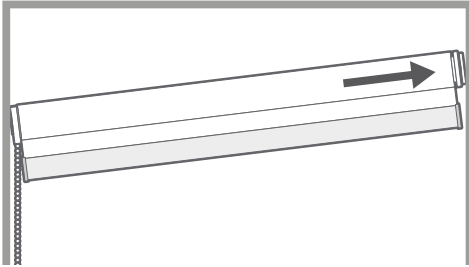


Make adjustments to the position of the blind so that it is straight and level, before locking it in place.




For safety reasons, always ensure that the top of the blind is installed at least 150cm (1500mm) from the floor.

For smaller blinds:



Tightener on the left



Tightener on the right


Hold the blind securely in place and turn the tightening wheel to tighten the blind in place.

If the tightener is on the left side of the blind turn it towards you. If it's on the right, turn it away from you.


Top Tip

Make sure that you tighten the wheel as much as you possibly can so that the blind remains secure and does not slip. If you find that the 'foot' of the mechanism that presses against the wall is spinning as you try to tighten, take the blind out of the window, tighten it a little, then push it back into place and try again.

For larger blinds:




Tightener on the left




Tightener on the right

Hold the blind securely in place and turn the tightening wheel to tighten the blind in place.

If the tightener is on the left side of the blind turn it towards you. If it's on the right, turn it away from you.



cap on the left






Cap on the right

Once the blind is secured in place, turn the end cap until it locks against the tightening wheel. This will lock the tightening wheel in place.

If the cap is on the left side of the blind turn it away from you. If it's on the right, turn it towards you.


Next, fit the blackout blind at the front. The process is exactly the same as for the rear blind.

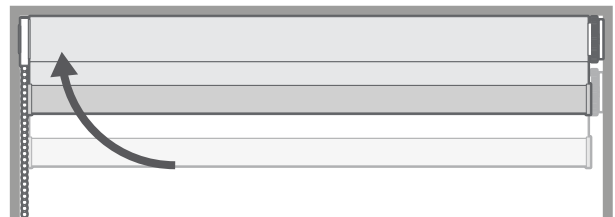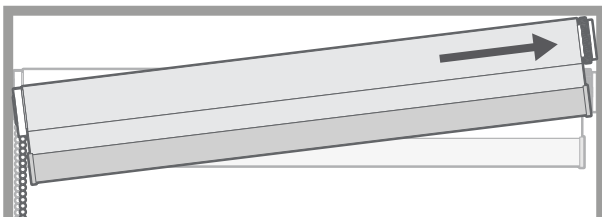

The front blind can be fitted at the top and front of the recess. If you'd prefer to have the blinds further back in the recess then that's fine, just make sure that the front blind is fitted roughly 50mm in front of the rear blind.

Cord Tensioner

Child Safety

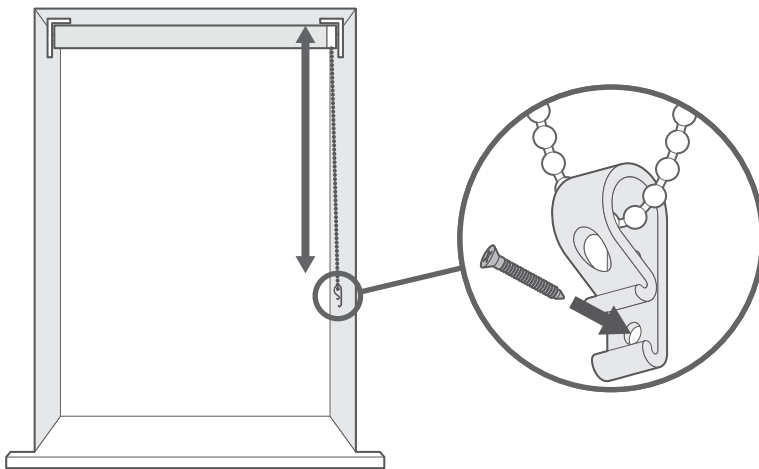

The cord retaining device must be installed at the maximum distance possible from the control mechanism to prevent looped cords from becoming slack.

Place the retaining device on the wall and mark the position of the screw hole(s) with a pencil.

Attach the retaining device to the wall using the fixings provided.



Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product.



To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck.

Move beds, cots and furniture away from window covering cords.

Do not tie cords together. Make sure cords do not twist and create a loop.