



We've made a handy video version of this fitting guide, just click the play button to view it.


If you prefer to print the instructions or simply to follow step-by-step, just keep reading.

## Fitting the brackets

1


If you upgraded to our Twist2Go system, skip to page 2.

The brackets offer three methods of installation:




### Top-Fixing

The brackets are screwed into the lintel (or 'ceiling' of the recess)



### Face-Fixing

The brackets are screwed onto a facing surface (a wall or window frame)



### Side-Fixing

The brackets are screwed into the side walls of the recess


### Top Tip



Top-fixing or face-fixing are recommended for most installations, whereas **side-fixing is only recommended if the width you gave us was taken right at the top of the recess.**

## Fitting the blind


2

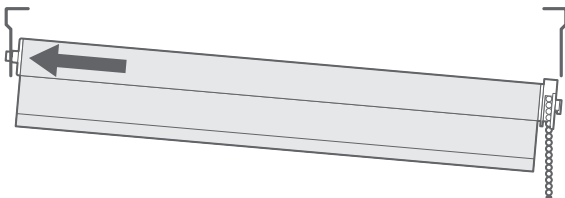

Locate the pin-end (the opposite end to the controls) of the blind into the central hole in the corresponding bracket.



Lift the control end of the blind and slot the rectangular 'lugs' into the corresponding slots on the bracket.

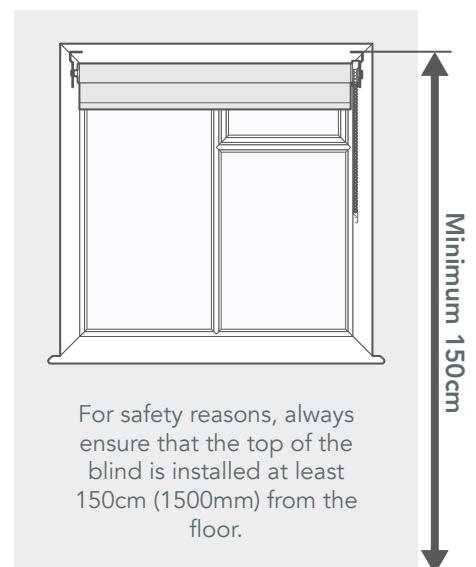

For safety reasons, always ensure that the top of the blind is installed at least 150cm (1500mm) from the floor.


## Fitting a Twist2Go Roller Blind




We've made a handy video version of this section too!

Again, if you prefer to print the instructions or simply to follow step-by-step, just keep reading.

Insert the blind into the recess at an angle and push the tightener against the wall.


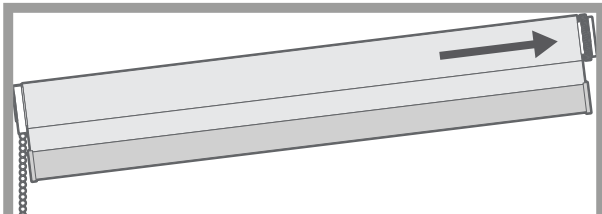


Lift the control end of the blind until level and release pressure, the blind will hold itself in place.

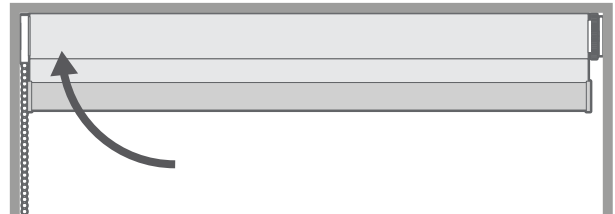

Make adjustments to the position of the blind so that it is straight and level, before locking it in place.

### For smaller blinds:





Hold the blind securely in place and turn the tightening wheel to tighten the blind in place.

Turn the wheel clockwise relative to the roller tube.

### Top Tip



Make sure that you tighten the wheel as much as you possibly can so that the blind remains secure and does not slip.

**For larger blinds:**



Hold the blind securely in place and turn the tightening wheel to tighten the blind in place.

Turn the wheel clockwise relative to the roller tube.




Once the blind is secured in place, turn the end cap until it locks against the tightening wheel. This will lock the tightening wheel in place.

Turn the cap anti-clockwise relative to the roller tube.

**Cord Tensioner**

**Child Safety**

**3**

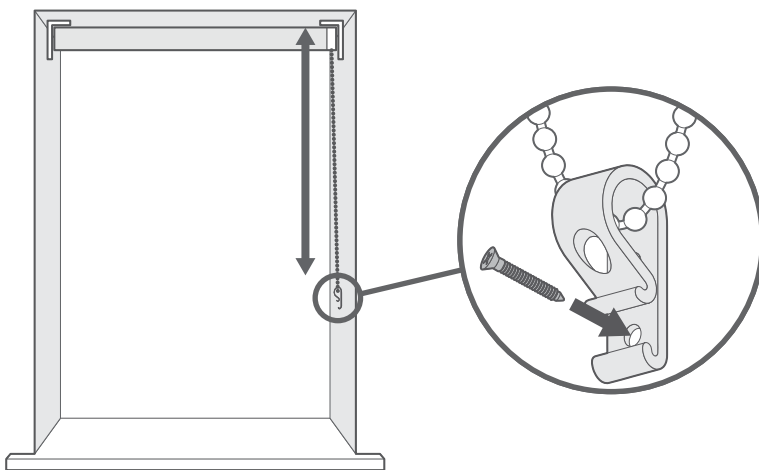


The cord retaining device must be installed at the maximum distance possible from the control mechanism to prevent looped cords from becoming slack.

Place the retaining device on the wall and mark the position of the screw hole(s) with a pencil.

Attach the retaining device to the wall using the fixings provided.



Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product.



To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck.

Move beds, cots and furniture away from window covering cords.

Do not tie cords together. Make sure cords do not twist and create a loop.