

Installation Guide Roller Blinds

Installing Roller Blinds is easy-peasy, we've made sure of it! Our guides will take you step by step through fitting your gorgeous new blinds in no time, and we've even made some handy video guides to accompany them. Choose the guide from the list below that matches the options you've chosen for your Roller Blind.

Standard Roller Blinds

Standard Roller Blinds

· Fitting the brackets

· Fitting the blind

Standard Roller Blinds

· Child Safety

Page 2

Page 3



SmartView Electric Roller Blinds

Standard Roller Blinds

· Fitting the brackets

· Fitting the blind

Page 4



Page 2 of 4 Next Page: Child Safety



Installation Guide

Standard Roller Blinds






We've made a handy video version of this fitting guide, just click the play button to view it.

If you prefer to print the instructions or simply to follow step-by-step, just keep reading.

Fitting the brackets


1

The brackets offer three methods of installation:




Top-Fixing

The brackets are screwed into the lintel (or 'ceiling' of the recess)



Face-Fixing

The brackets are screwed onto a facing surface (a wall or window frame)




Side-Fixing

The brackets are screwed into the side walls of the recess




Fitting the blind





Locate the pin-end (the opposite end to the controls) of the blind into the central hole in the corresponding bracket.



Lift the control end of the blind and slot the rectangular 'lugs' into the corresponding slots on the bracket.



Page 2 of 4 Next Page: Child Safety




Installation Guide

Standard Roller Blinds



Cord Tensioner

Child Safety

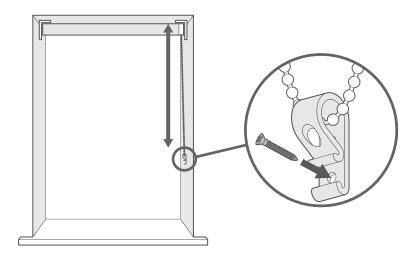

The cord retaining device must be installed at the maximum distance possible from the control mechanism to prevent looped cords from becoming slack.

Place the retaining device on the wall and mark the position of the screw hole(s) with a pencil.

Attach the retaining device to the wall using the fixings provided.



Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product.

To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck.

Move beds, cots and furniture away from window covering cords.


Do not tie cords together. Make sure cords do not twist and create a loop.



1


Fitting the brackets

The brackets offer three methods of installation:



Top-Fixing

Where the brackets are screwed into the lintel (or 'ceiling' of the recess)



Face-Fixing

Where the brackets are screwed onto a facing surface (a wall or window frame)




Side-Fixing

Where the brackets are screwed into the side walls of the recess




Fitting the blind



Locate the depression end (the opposite end to the controls) of the blind into the circular hole in the corresponding bracket. Lift the control end of the blind and slot the rectangular 'lugs' into the corresponding slots on the bracket.

Once your blind is installed we recommend plugging in the motor to allow it to fully charge before use. Plug the charging cable (included) into the motor charging port and allow to charge until the LED on the charger plug turns green.





On the front of the swing tag that comes with your blind, you'll find a handy QR code you can scan with your phone. Scan this to download the SmartView app - you'll be setting up your blinds in moments!

Recycle your electrical and electronic devices free at your local recycling centre. To find your nearest centre, visit the Recycle More website and type in your postcode.

