



## Unpack the blind and fitting the brackets



- 1** Unpack the blind and lay it flat with the cords extended.



**2** Allocate the brackets so those with the winged area to the right are used for the left hand side of the blind and those with the winged area to the left are used for the right hand side of the blind.




When unpacking your blinds from the protective wrap, DO NOT cut on the side where the cords are stored.

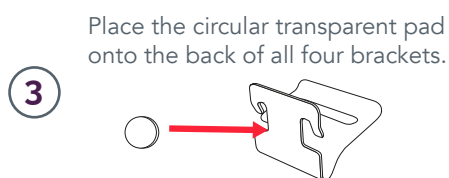

- 4** Click the cord attachment into the mounting point on the bracket.

## Fitting the blind to the window

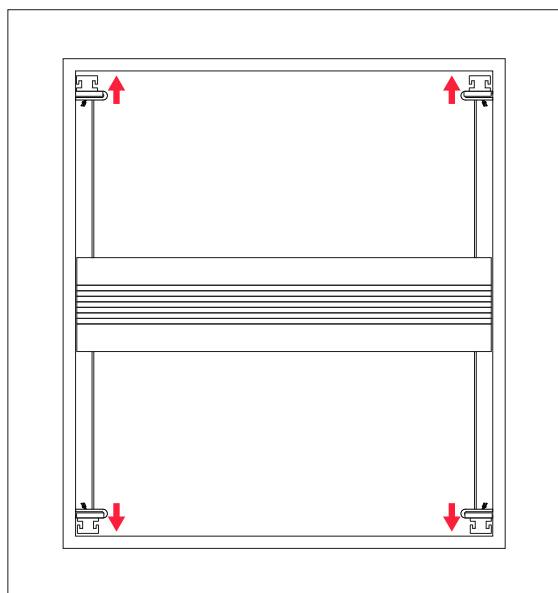


Click the brackets into the window to complete the installation

NB: The bracket fits under the rubber or mastic seal so that it sits flush to the glass area.

If the seal is quite stiff, apply a small amount of washing-up liquid to the area that the brackets will be fitted to ease the installation.

## Fine Tuning the Tension

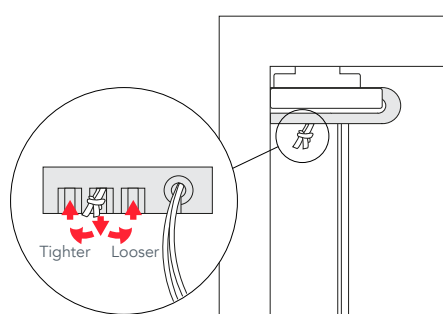

The tension on the blind should be correct for your window as soon as it's fitted. However if you find that the blind is loose and slips down or is stiff to operate, you may want to adjust the tension.

This can be done without taking the blind down, just move the knot along to the adjacent slot using the one towards the frame to tighten the tension or the one towards the centre of the window to loosen the tension.

While all four brackets allow for the tension to be altered, it is rare that all four would need changing. Adjust the bottom two first and then test the blind, the tension should be sufficiently tightened or loosened. Only alter the knot position on the top brackets if further adjustment is required.